

F L E X I B L E A B R A S I V E S

SKORPIO

Flap Discs

CERAMIC

**EXCEPTIONALLY HIGH
MATERIAL REMOVAL RATES**

Zircon
grit
500 g

Ceramic
grit
1200 g



SELF-SHARPENING



**HIGHLY RECOMMENDED
FOR HIGH SPEEDS
AND PRESSURES**

Max. 80 m/s




SWATY COMET




CERAMIC

- QUICKER AND GREATER
MATERIAL REMOVAL
» 120 % HIGHER REMOVAL «

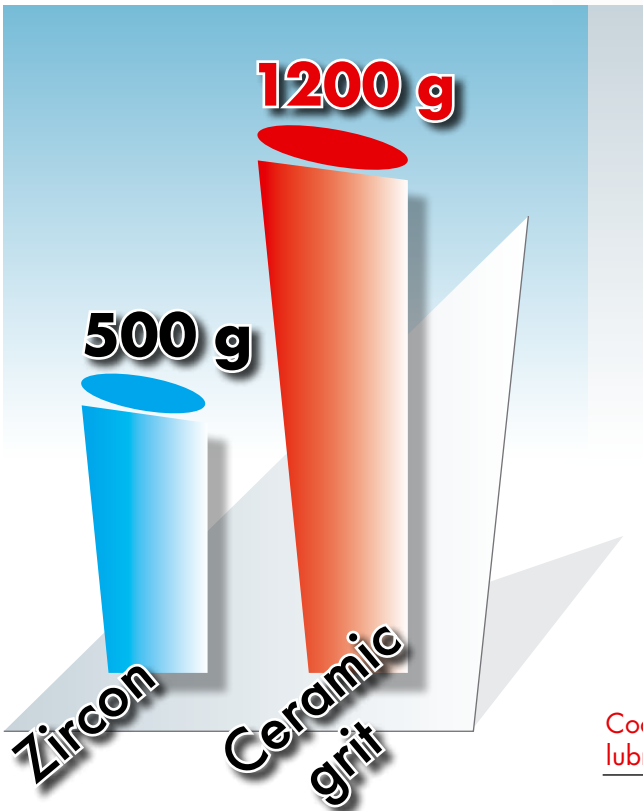

Cooling and lubricating effect

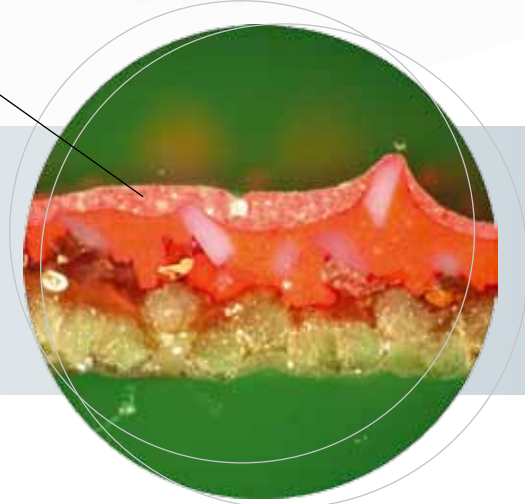

Uniform surface roughness:

- Optimal grit distribution across the base, with active additives;
- Continuous self-sharpening of the grit throughout the grinding process.

Long tool life:

- Good adherence of the grit to the polyester base;
- Active additives;
- High grit aggressiveness.



Shape	Dimensions D x H mm	Periph. speed m/s	Max. RPM 1/min	Grit size	Packaging (units)
F29	115 x 22,23	80	13300	36 40 60 80 120	10
F29	125 x 22,23		12200	36 40 60 80 120	
F29	180 x 22,23		8500	36 40 60 80 120	



SWATYCOMET, umetni brusi in nekovine, d.o.o.
Titova cesta 60, 2000 Maribor, Slovenija
t: +386 (0)2 333 16 00, +386 (0)3 7575 000
f: +386 (0)2 333 17 90, +386 (0)3 7575 100
www.swatycomet.si, e: info@swatycomet.si

ISO 9001
ISO 14001
BUREAU VERITAS
Certification

